

EMILUX LIGHTING TECHNOLOGY CO.,LTD

Factory Address: A building, Guanhuang road 1#, Hengjiaotuo village, Gaobu Town, Dong Guan City, Guangdong Province, China.523269

<https://www.emiluxled.com> info@emiluxled.com



LED TRIPLE SPOT LIGHT DATASHEET

EMILUX LIGHTING TECHNOLOGY CO.,LTD

Factory Address: A building, Guanhuang road 1#, Hengjiaotuo village, Gaobu Town, Dong Guan City, Guangdong Province, China.523269

<https://www.emiluxled.com> info@emiluxled.com

Square Spot lights triple 3x12W



Part No.	EM05-ES4-312-36W-3000K
Description	Spot lights triple max 3x12W
Dimming	Triac/ 0-10V/ DALI dimming optional

EMILUX LIGHTING TECHNOLOGY CO.,LTD

Factory Address: A building, Guanhuang road 1#, Hengjiaotuo village, Gaobu Town, Dong Guan City, Guangdong Province, China.523269

<https://www.emiluxled.com> info@emiluxled.com

● Datasheet:

Type	Product :	Spot light
	Model No. :	EM05-ES4-312-36W-3000K
Electronical	Input Voltage :	220-240V/AC
	Frequency :	50Hz
	LED Driver :	Tridonic LC 15/300/50 fixC SR SNC2/300MA x 3
	Power :	3x12W
	Power Factor :	0.5
	Total Harmonic Distortion :	<5%
	Certificates :	CE EMC Applicable (EN IEC 55015: 2019+A11:2020) Standards (EN 61547:2009,EN IEC 61000-3-2: 2019,EN 61000-3-3:2013+A1:2019) LVD (EN 60598-1 & EN 60598-2-2) Standards (EN 60598-1:2015+A1:2018, used in conjunction with EN 60598-2-2:2012) RoHS directive 2011/65/EU Annex II amending Annex (EU)2015/863 and amending Annex (EU)2017/2102.
Optical	Cover Material :	PC
	Beam Angle :	15/24/36/55°
	LED Quantity :	1pcs
	LED Package :	Bridgelux DS407 Gen 8 V6 HD x 3
	Luminous Efficiency :	3 x 1020lm
	Color Temperature :	3000K
	Color Render Index :	90
Lamp Structure	Housing Material :	Aluminum die-casting
	Diameter :	230 x 85 x 90(H)mm
	Installation Hole :	Hole Cut 75 x 220mm
Surface Finished	Fished	Powder painting(white color/customized color)
Water proof	IP Rating	IP20
Others	Installation Type :	Recessed Type (refer to the Manual)
	Application :	Hotels, Supermarkets, Hospital, Aisles, Metro Station, Restaurants, Offices etc.
	Ambient Humidity :	≥80%R.H.
	Ambient Temperature :	-10°C~+40°C
	Storage Temperature :	-20°C~50°C
	Housing Temperature (working) :	<70°C (Ta=25°C)
	Lifespan :	50,000H

EMILUX LIGHTING TECHNOLOGY CO.,LTD


Factory Address: A building, Guanhuang road 1#, Hengjiaotuo village, Gaobu Town, Dong Guan City, Guangdong Province, China.523269

<https://www.emiluxled.com> info@emiluxled.com

Remarks :

1. All pictures data above are only for your reference, models may slightly differ due to factory operation.
2. According to demand of Energy Star Rules and other Rules, Power Tolerance $\pm 10\%$ and CRI ± 5
3. Lumen Output Tolerance 10%
4. Beam Angle Tolerance $\pm 3^\circ$ (angle below 25°) or $\pm 5^\circ$ (angle above 25°)
5. All Data were gained at Ambient Temperature 25°C

- **Dimension:** (unit: mm $\pm 2\text{mm}$, The following picture is a reference picture)

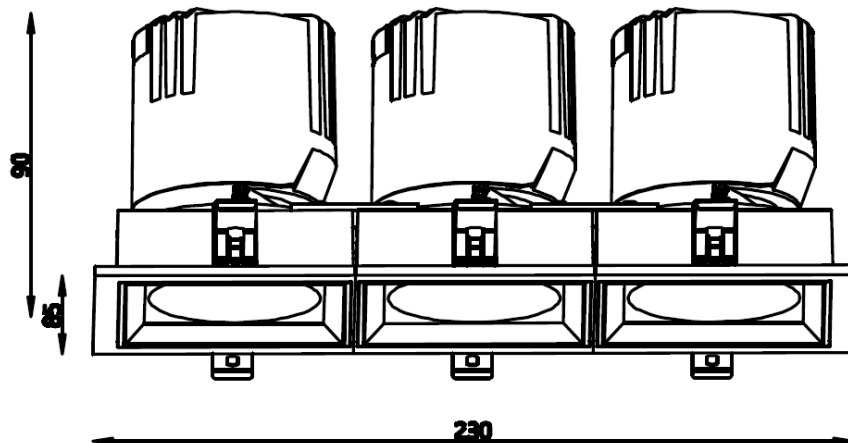

开孔: 220X75

Model	Bezel ① (caliber)	Bezel ② (caliber)	Height ③	Suggested Hole Cut	Net Weight (Kg)	Remark
EM05-ES4-312	□230	□85	90	75*220	1.78	


EMILUX LIGHTING TECHNOLOGY CO.,LTD

Factory Address: A building, Guanhuang road 1#, Hengjiaotuo village, Gaobu Town, Dong Guan City, Guangdong Province, China.523269

<https://www.emiluxled.com> info@emiluxled.com

● Installation: (Notes on installation and wiring)

Please pay more attention to the below instructions while installation, in order to avoid any possible Fire Hazard, Electric Shock or Personal harm。

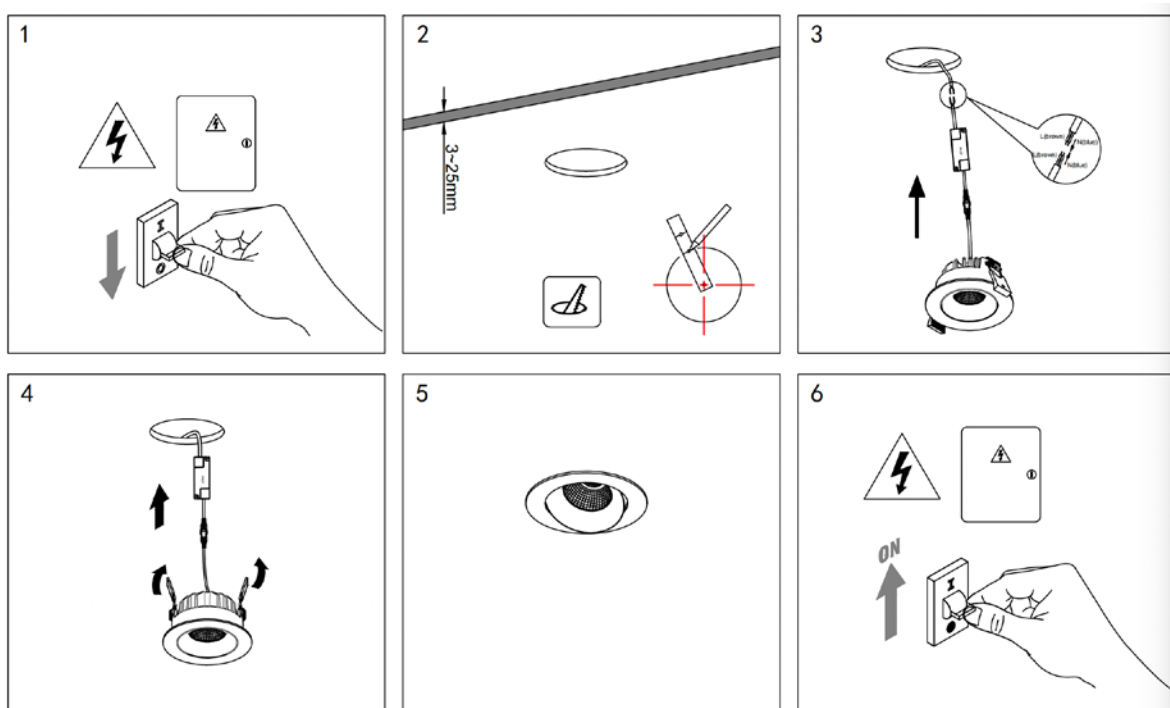

Instructions:

1. Cut off Electricity before installation.
2. Please do not block any objects on the lamp (distance scale within 70mm), which will definitely affect heat emission while lamp's working
3. Please double check before getting electricity on if wiring is 100% OK, make sure Voltage for lamp is right and no Short-Circuit.

EMILUX LIGHTING TECHNOLOGY CO.,LTD

Factory Address: A building, Guanhuang road 1#, Hengjiaotuo village, Gaobu Town, Dong Guan City, Guangdong Province, China.523269

<https://www.emiluxled.com> info@emiluxled.com

● **Wiring:**

The Lamp can be directly connected to City Electric Supply and there'll be detailed User's Manual and Wiring Diagram.

Warning:

1. The Lamp is only for Indoor and Dry application, keep away from Heat, Steam, Wet, Oil, Corrosion etc., which may affect its performance and shorten the lifespan.
2. Please strictly follow the instructions while installation to avoid any Hazard or damages.
3. Any installation, check or maintenance should be done by professional, please do not DIY if without enough related knowledge.
4. For better and long performance, please clean the lamp at least every half year with soft cloth. (Do not use Alcohol or Thinner as cleaner which may damage the lamp surface)
5. Do not expose the lamp under strong sunshine, heat sources or other high-temperature places, and storage boxes cannot be piled up exceeding the requirements.